







TD/TE06018-H横流风机



EC控制壳

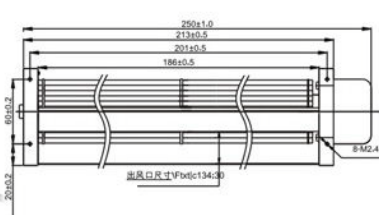

EC控制壳外型尺寸

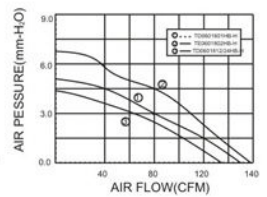

- ★ 绝缘等级 Insulation: Class B
- ★ 安规认证 Certification: UL\CUL\CE\CCC
- ★ 功能选择 Available Features: · Tachilable Out put转速输出 · Autorestart自动重启 · Slow startup软启动 · Control input控制输入0--5VDC
- ★ EMC: Interference emission acc.to EN 61000-6-3
- ★ 保护等级 Type of protection: IP42
- ★ 温度范围 Operation Temperature: -25--70°
- ★ 工作模式 Mode of operation: S1
- ★ 材质 Material: Sheet steel \Aluminum\Pa66
- ★ 产品符合标准: EN 60950-1

● SPECIFICATIONS

产品型号 Model	轴承型式 Bearing System	电压 Voltage V	电压范围 Voltage Range	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise DBA	风量 Air Flow		静压 Static Pressure		重量 Weight G
								M ³ /H	CFM	Pa	mmH ₂ O	
TE0601801HB-H	Ball	110VAC	85—130	0.40	25	3700	62	230.0	135.3	62.1	6.3	1020
TE0601802HB-H	Ball	220VAC	85—265	0.22	26	3800	64	236.3	139.0	63.8	6.5	1020
TD0601812HB-H	Ball	12VDC	6—13.2	1.44	17.28	3100	52.2	192.3	113.2	51.9	5.3	1130
TE0601824HB-H	Ball	24VDC	12—26.4	0.82	19.68	3100	52.2	192.3	113.2	51.9	5.3	1130

产品规格/承认书

Product Specification/Approval Sheet

型号(Model NO.)		TD0601812HB-AH-GP	编号(Part NO.)	YDA12303 2D
安规(Safety Approvals)		<input type="checkbox"/> UL <input type="checkbox"/> CE <input type="checkbox"/> TUV <input checked="" type="checkbox"/> 无	安规编号 (File NO.)	
1.一般规格 (General Specification)				
1.1	额定电压(Rated Voltage)		DC12V	
1.2	工作电压范围(Operating Voltage Range)		DC9V~DC13.2V	
1.3	起动电压(Starting Voltage)		DC9V	
1.4	额定电流(Rated Current)		实测电流: 1.11A±0.12A 标签电流: 1.28A	A.额定电压(Rated Voltage) B.25℃ C.65%RH
1.5	锁机电流(Lock Rotor Current)		0A	
1.6	额定功率(Rated Power Consumption)		13.3W±1.44W	
1.7	转速(Speed)	2900R.P.M. ±10%	A.额定电压(Rated Voltage) B.25℃,65%RH C.自由空气(Free Air)	
1.8	风量(Air Flow)	133.4CFM	A.风压(Air Pressure)=0 B.额定电压(Rated Voltage)	
1.9	风压(Static Pressure)	4.87mmH ₂ O	C.额定电流(Rated Current) D.风量(Air Flow=0)	

1.10	噪音(Noise)	62dB(A)	A.额定电压(Rated Voltage) B.无响室测试(Measured in a Non-Echo Chamber) (18+1dbA) C.1M 间距(Distance 1M)	
1.11	寿命(Life Expentancy)	<input type="checkbox"/> 30000h <input type="checkbox"/> 40000h <input checked="" type="checkbox"/> 50000h	A.额定电压(Rated Voltage) B.30℃	
1.12	运转方向(Rotaing Direction)	<input checked="" type="checkbox"/> 右马达 <input checked="" type="checkbox"/> 顺时针(马达壳面方向)		

2.主要材料/零件规格(Main Materials /Parts Specification) ■RoHS (环保) □Not RoHS (非环保)		
2.1	塑胶材料/扇叶、外框、绝缘套 (Plastic Material/Blade、Housing、 Bobbin)	外框 (铁) 扇叶 (铝叶) 银白色
		■ Black (黑色) □ White (白色) □ Transparent (透明)
2.2	轴承(Bearing)	滚珠轴承 (Two Ball Bearing)
2.3	导线(Lead wire)	Red(+),Black(-):UL1007\24AWG
2.4	端子胶壳 CONN.Housing	2.54/3P 中空 正向

3.电气规格(Electrical Specification)		
3.1	绝缘阻抗 (Insulation Resistance)	10MΩ/导线与外框间测量, 500VDC/Min(10MΩ/b/w/unshielded wire and frame at 500VDC/min)
3.2	绝缘耐压 (Dielectric Strength)	5MA Max./导线与外框间测量,500VAC/Min(5MA Max./Measured b/w lead wire(+)and frame at 500VAC/min)

4.环境测试(Environmental Specification)		
4.1	工作温度范围 (Operating Temperature Range)	-10℃---70℃
4.2	贮存温度范围 (Storage Temperature Range)	-20℃---80℃
4.3	工作湿度范围 (Operating Humidity Range)	35%---80%

5.其它功能 (Other Features)		
5.1	自动起动 (Auto restart)	■Yes (是) □No (否)
5.2	锁机报警 (Lock Rotor Alarm)	□Yes (是) ■No (否)
5.3	转速信号 (FG)	□Yes (是) ■No (否)
5.4	温度控制 (Thermal Control)	□Yes (是) ■No (否)
5.5	IP 等级 (IP Grade)	■Dampproof (防潮) □Waterproof (防水) ■IP__04__
5.6	PWM 控制 (PWM Control)	□Yes (是) ■No (否)
5.7	极性保护 (Polarity Protection)	■Yes (是) □No (否)